


SCHEMATIC

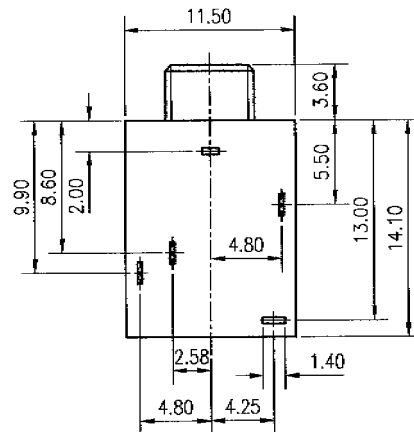

J	COVER	1	PVC	TRANSPARENT
H	SPRING	2	SPRING WIRE	
G	BREAK TERMINAL	1	PHOSPHOR BRONZE	Ag PLATED
F	BREAK TERMINAL	1	PHOSPHOR BRONZE	Ag PLATED
E	TIP TERMINAL	1	PHOSPHOR BRONZE	Ag PLATED
D	RING TERMINAL	1	PHOSPHOR BRONZE	Ag PLATED
C	EARTH TERMINAL	1	PHOSPHOR BRONZE	Ag PLATED
B	RING	1	BRASS	Ni PLATED
A	HOUSING	1	POM	BLACK
SIGN	PART NAME	QTY.	MATERIAL	REMARK

## **LUCKY FIRST INDUSTRIES LIMITED**

TITLE: STEREO EARPHONE JACK	MODEL NO.: ST-214-C	UNIT: mm
RATING: DC 50V 0.5A	OPERATION FORCE: 1.5±0.15kgf	SCALE: 3:1
SWITCHING LIFE: 10,000 CYCLES (15-18 CYCLES/MIN. UNLOADING)		
CONTACT RESISTANCE: 30m ohm MAX	DRAWN BY: LENG DWAN	
INSULATION RESISTANCE: 100M ohm AT 250V DC	CHECKED BY: <i>Dawell</i> 18.08.96	
WITHSTAND VOLTAGE: 500V AC FOR 1 MIN.	APPROVED BY:	

Atty: Karon Tan (2914-6321)  
 For: Man dan.